

# zipUP<sup>®</sup>

UNDERDECK<sup>®</sup> SYSTEM

Expands Outdoor Living Area

**KEEPS UNDERDECK  
CLEAN & DRY**

## A REVOLUTIONARY NEW UNDERDECKING SYSTEM


### *FEATURES & BENEFITS*

- Hurricane Tested
- Professionally Approved Product
- Quick & Easy to Install
- Requires Fewer Tools
- Meets Class A Fire Rating
- Saves Headroom in Tight Spaces
- Panels Easy to Remove for Access
- Clean & Grid-Free Look
- Easy to Clean
- Stain, Mold & Mildew Resistant
- Interlocking Design is Water Tight
- Paintable with Latex Paint

Zip-UP Underdeck<sup>®</sup> finishes the underside of your deck providing dry, usable outdoor living space without sacrificing headroom or the beauty of your deck. The Zip-UP Underdeck System provides ease of installation and a washable mold resistant surface, while channeling any water from above to your gutter system.

# ZipUP<sup>®</sup>

UNDERDECK<sup>®</sup> SYSTEM

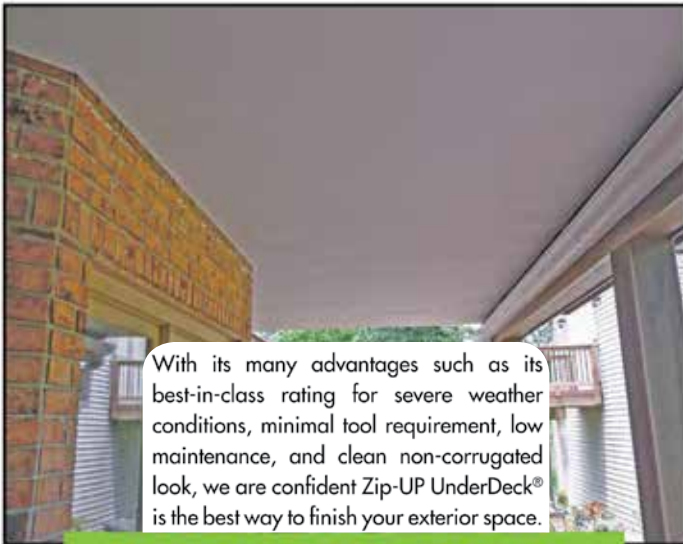

With its many advantages such as its best-in-class rating for severe weather conditions, minimal tool requirement, low maintenance, and clean non-corrugated look, we are confident Zip-UP UnderDeck<sup>®</sup> is the best way to finish your exterior space.

**KEEP YOUR PATIO  
CLEAN & DRY**



**CREATE MORE  
LIVABLE  
OUTDOOR  
SPACE!**

## 5 COMPONENTS DO IT ALL!




### Wall Trim:

The "E" shaped trim that attaches to the walls or joist around the entire periphery.  
12' length



### Main Rail:

The mounting pieces that will run the length of your room attached to your joists.  
12' and 16' lengths



### Panel:

The visible surface of your Zip-UP UnderDeck<sup>®</sup> System. The panels "Zip-UP" into the rails allowing for easy maintenance access.  
1' Width / 12' and 16' lengths



### Seam Trim:

Allows for the extension of your ceiling application by capping the ends of your Main Rails that do not end at Wall Trim. The next section is installed the same as the first.  
12' length



### Pitching Rail:

Used to impart a slope of 1/8 inch per foot in order to properly drain your under deck system in the direction of your gutter. They come in 1 inch and 1/2 inch profiles and are stacked incrementally every 4 feet to provide proper pitch.  
12' length

## INSTALLS IN 5 EASY STEPS!

1. Attach pitching rails for drainage.
2. Attach wall trim around the perimeter of the deck.
3. Insert the first panel into the wall trim, and seal as instructed in the installation guide.
4. Attach the first main rail to the first panel.
5. Secure the main rail to the pitch rail.

**Repeat steps 3-5 across the room.**

## 25 YEAR LIMITED WARRANTY

MP Global Products, LLC ("Manufacturer") warrants that its Zip-UP Underdeck<sup>®</sup> System ("Product") is free from defects in manufacturing, materials and workmanship for a period of 25-years from the date the Product was originally purchased (the "Limited Warranty Period"). Manufacturer further warrants that the Product will snap together as designed for the limited warranty period. This limited warranty is extended to the original purchaser of the Product (the "Owner") and is subject to the exclusion and limitations provided below. This warranty is not transferable during the Limited Warranty Period.

33 Hess Road • Leola, PA 17540



CardinalBuildingProducts.com

**DEALER**

CBPM0013 11-14